

GEMINI



EARTHING PRODUCTS

Copper Bonded Earth-Rod

- Highly conductive pure Electrolytic Copper which is uniformly bonded to Steel core to ensure excellent resistance to corrosion.

Nominal Thread Size	Length in Feet	Rod Diameter
1/2"	4'	12.7 MM
1/2"	5'	12.7 MM
1/2"	6'	12.7 MM
1/2"	8'	12.7 MM
5/8"	4'	14.2 MM
5/8"	5'	14.2 MM
5/8"	6'	14.2 MM
5/8"	8'	14.2 MM
5/8"	10'	14.2 MM
3/4"	4'	17.2 MM
3/4"	5'	17.2 MM
3/4"	6'	17.2 MM
3/4"	8'	17.2 MM
3/4"	10'	17.2 MM


COUPLINGS

- Long length high copper alloy couplings counter bored to completely enclose threads, protecting them from damage and corrosion.



ROD TO CABLE CLAMPS

- Manufactured in Brass and Screw Steel Platted.
- Strength of the Screw enables it to be fully tightened ensuring good electrical contact.

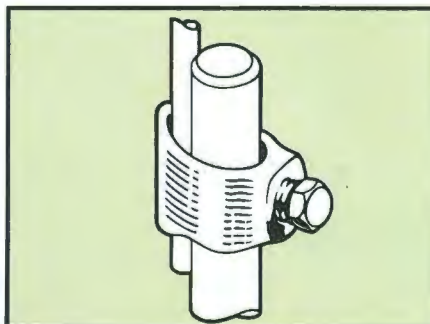

Nominal Rod Diameter	Conductor Range mm²
3/8"	6-35
1/2"	16-50
5/8"	16-70
3/4"	16-95
1"	70-120

- Suitable for use with 8 mm Diameter, Solid Circular Copper Conductor.